


Cupforma Natura Aqua+™ 2SB

Bleached cup board

Cupforma Natura Aqua+ 2SB is a virgin-fibre bleached cup board with a three layer fibre construction with CTMP (chemi-thermomechanical pulp) in the middle layer and dispersion barrier on both sides.

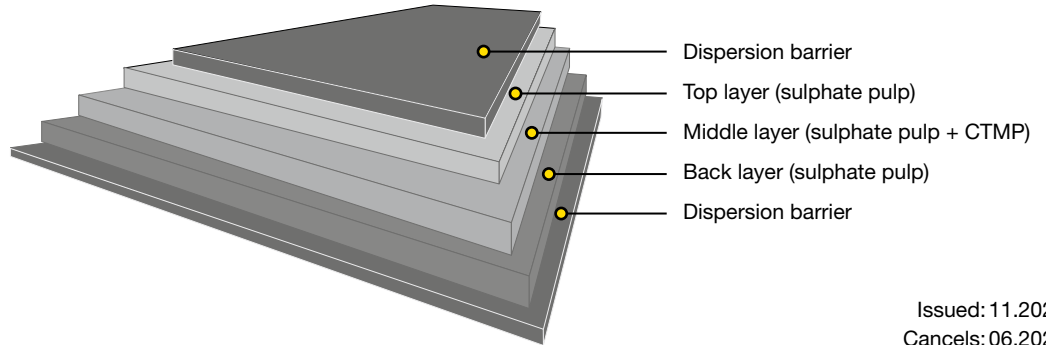

Issued: 11.2022
Cancels: 06.2021

Tentative technical specification

Dispersion coated board:

								Standard
Grammage, g/m ²	206	217	236	254	282	317	352	ISO 536
Thickness, µm	265	290	315	345	385	425	465	ISO 534
Bending resistance L&W 15° MD, mN	135	165	195	200	315	435	460	ISO 2493-1
Bending resistance L&W 15° CD, mN	55	70	85	110	155	215	290	
Moisture %	6.0	6.0	6.5	6.5	6.5	6.5	6.5	ISO 287
Brightness D65/10, %, Top	80	80	80	80	80	80	80	ISO 2470-2
Surface smoothness, Bendtsen, ml/min	200	200	200	250	300	350	400	ISO 8791-2
Stretch CD, %	5.0	5.0	5.0	5.0	5.0	5.0	5.0	ISO 1924-3



Cupforma Natura Aqua+™ 2SB

Bleached cup board

Certificates

- Quality management ISO 9001
- Environmental management ISO 14001
- Product safety FSC 22000
- Product safety ISO 22000
- Occupational health and safety ISO 45001
- Energy management ISO 50001



FSC and PEFC certified board available upon request.



Paperboard is recyclable

Key characteristics and main enduses

Cupforma Natura Aqua+ 2SB is a sustainable choice; a high-quality carton board designed especially for cups. It is food-safe, ecological, and works smoothly and consistently in cup converting. It is also economical as the board's structure provides the required stiffness; resulting in light, yet functional cups. Combined with dispersion coating on both sides, Cupforma Natura Aqua+ 2SB is sealed easily into a cup or a cup lid, and used for hot and cold drinks as well as ice cream.

Printing and converting techniques

The product can be used for different printing techniques such as digital printing. It is important to check possible limitations of the printing and converting equipment and ensure that the basis weight of the board fits the tooling to be used.

Storage recommendations

For optimal converting results, the moisture proof wrapping should not be removed until the board has reached the temperature of the press room.

Pallet/Reel Weight (kg)	Difference in temperature between board and press room (press room temp. approx. 20°C)		
	10°C	20°C	30°C
400 kg	2 days	2 days	3 days
800 kg	2 days	3 days	4 days
1200 kg	2 days	4 days	5 days

The product properties, according to the specifications, are guaranteed for 12 months after the production date. In order to ensure product safety, the product must be well wrapped and stored indoors, sheltered from rain and snow. The recommended storage conditions are 50-55% relative humidity and 20-23° C.